

DT-7000

P2600

Intelligent Deposit Machine

P2600 is one compact machine for managing the retailing deposit process, including counting and storage to create the convenient and safe environments for customer satisfaction. The benefits of using P2600 become recognized and indispensable. The intelligent technology ensures to deliver in an easier & safe transportation and the sophisticated design requires minimal space to deliver various functions.

- *Efficient Application*
- *Affordable Expense*
- *Reliable Quality & Durability*
- *Sophisticated & Compact Design*
- *Convenient & Secure Transportation*



P2600 Intelligent Deposit Machine

Sophisticated Design with Compact Footprint

Features

High-speed Deposit

- ♦ Banknotes are counted up to 720 pieces per minute. The large infeed hopper can accommodate up to 500 pieces per minute to reduce the count time
- ♦ Optimized transit path and algorithm ensure ultra-low jam rate

Storage Bag with Sufficient Capacity

- ♦ The contents are secured in the bag via an automatic closure
- ♦ The bag can hold up to 5,000 notes at one time*

Satisfactory Customer Experience

- ♦ The compact design can meet the requirement of retailers, petrol stations, etc. for the cost efficiency
- ♦ Experiences to handle various foreign currencies in a reliable and productive manner

Specifications

Controlling Unit

- ♦ Intel® Atom™ D2550 2.0 GHz, CPU 4G RAM
- ♦ 128G HDD
- ♦ Windows® 7
- ♦ Support: LAN, COM & USB

Banknote Processing Unit

- ♦ Bulk Note Deposit Module:
- ♦ Processing Speed: 720 notes/minute
- ♦ Entrance Capacity: 500 notes/non-stop
- ♦ Support Envelope deposit: C6 162mm * 114mm
- ♦ Cash Reject Capacity: 100 notes
- ♦ Escrow Stacker: 200 notes
- ♦ Banknotes Storage Bag: 5,000 notes*

Customer Interfaces

- ♦ Display:
 - 5" LCD Touch Screen
 - Max Resolution: 800*480 pixels
 - Interface: LVDS
- ♦ Receipt Printer: 58mm graphical thermal printer

Communication

- ♦ Standard TCP-IP connection

Security


- ♦ Physical:
 - Electronic lock
 - Standard UL291 Level 1 safe, Reserved Position to Fix E-lock
 - PIN Pad Shield
- ♦ EMV Compliant

Working Environment

- ♦ Temperature:
 - Indoor: 32°F (0 °C) to 104°F (40 °C)
- ♦ Relative humidity: 20% to 95% non-condensing

Dimensions & Weight

- ♦ Height: 38.19 in. (1050mm) Width: 14.17 in. (350mm)
- ♦ Depth: 19.69 in. (411mm) Weight: approx. 110kg

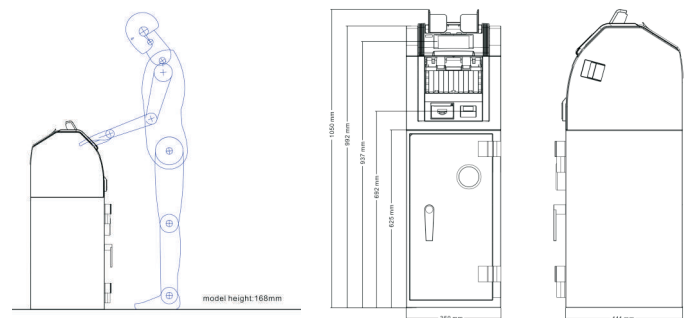

*The actual capacity is subject to the thickness and fitness of local currency.



GRGBanking Equipment Co., Ltd.

9,11 Kelin Road, Science City, High-tech Industrial Development Zone,
Guangzhou, China 510663
Tel: +86-20-6287 8545
Fax: +86-20-6287 9976
E-mail: atm@grgbanking.com

Specifications are subject to update without prior notice.
Please consult GRGBanking or its representative for the latest information.